


ITEM

**GBA.102.0000.xx** COMBINATION PAPER TOWEL DISPENSER / WASTE UNIT BIG - RECESSED  
**GBA.102.00WR.00** REMOVABLE WASTE RECEPTACLE - NOT INCLUDED

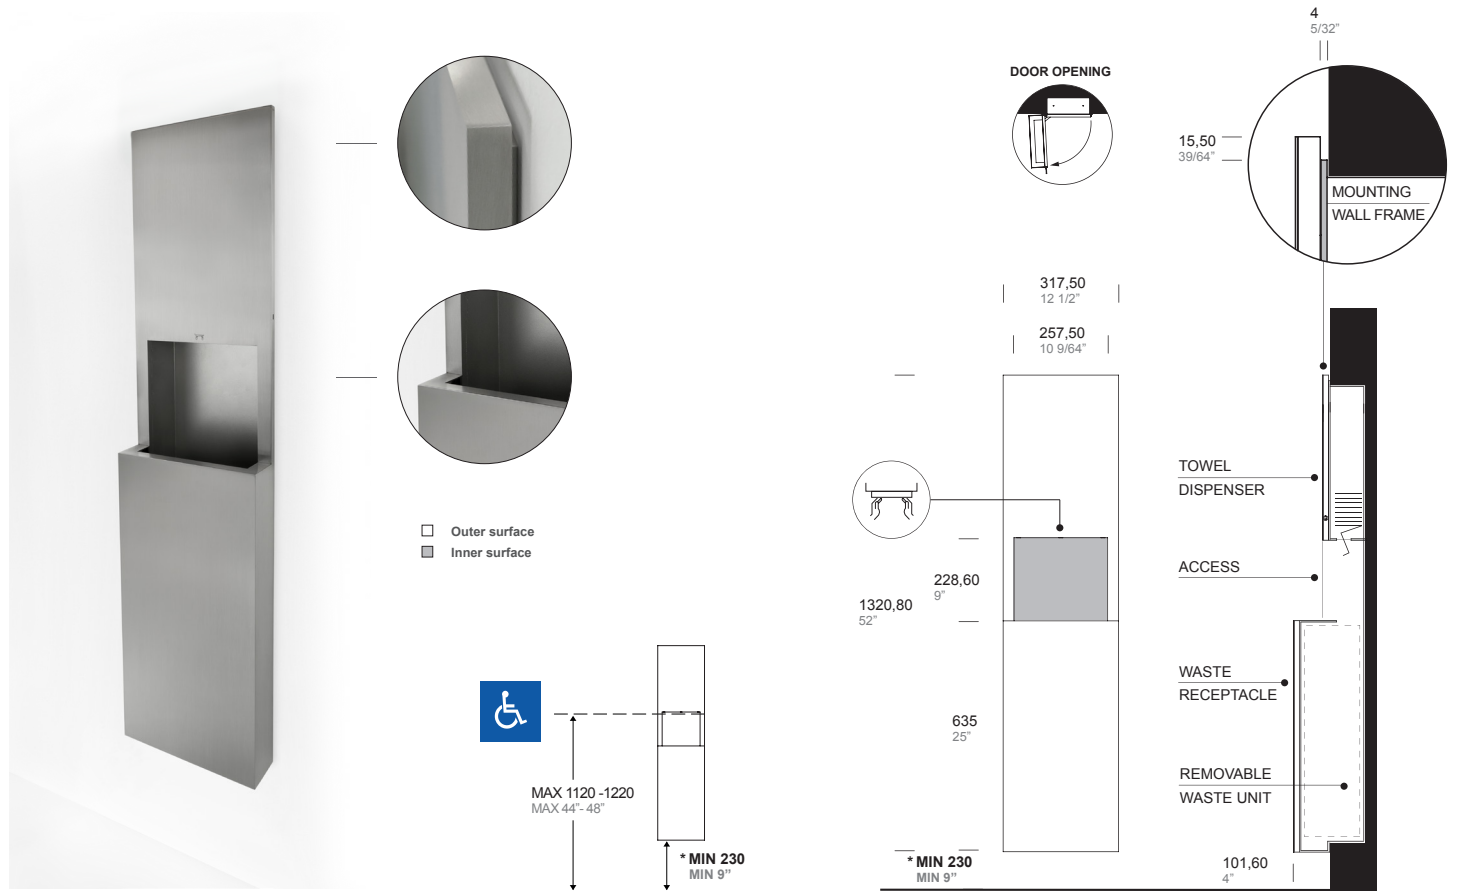

**GBA.102.0000**

**SPECIFICATION:**

Combination of paper towel dispenser and waste unit high capacity for recessed installation with overall dimensions 52" (H) x 12-1/2" (W) and 3-63/64" total projection from wall.  
Mounting wall frame in 5/32" (4 mm) thick welded on a all-welded construction in 3/64" (1 mm) thick type 316L stainless steel with powder coated finish. Integrated paper towel dispenser which shall dispense up to 600 C-fold or multifold (Z-fold) paper towels.  
Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).  
Front door with beautiful non-rounded design made with 1/16" (1,5 mm) and 5/64" (2 mm) thick type 316L stainless steel welded-per-point. Reinforced structure with full height square 19/32" (15 mm) type 316L stainless steel tube. Exposed surfaces of front door have satin finish.  
Integrated hinge system to allow the door opening with a minimum gap from the wall (thickness of mounting wall frame).  
Unit equipped with a slider door-opening limiter and a concealed closure system which keeps the door closed (not locked). Rectangular hole on side allows access to open the unit with provided key. Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) to be ordered separately with a capacity of 7,11 US gal (26,9 L). Waste receptacle shall be model GBA.102.00WR.00. One key included.

**OPERATION:**

Maintenance - Use provided key from side hole to open the front door to have access to recessed unit. The sliding door-opening limiter prevents the door for extra-overture which may cause damages to the wall / tiles. Place recharge of paper towel packs through the front opening of the dispenser. The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.  
User - Paper towel dispenser will dispense up to 600 C-fold or multifold (Z-fold) paper towels from the front opening window.  
Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

**INSTALLATION:**

Provide framed rough wall opening 50-1/8" height x 10-5/8" width (1273 x 270 mm). Suggested depth to finish face of wall is 4-1/4" (108 mm); minimum recessed depth required is 4". Allow clearance for construction features that may protrude into rough wall opening from opposite wall and avoid pipes, vents and conduits. Mount unit into wall opening and secure with provided fixing screws in 4 mounting holes on the recessed cabinet.

**GBA.102.00WR.00**

**SPECIFICATION:**

Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) with a capacity of 7,11 US gal (26,9 L) suitable for item GBA.102.0000.  
Dimensions 23-1/8" (H) x 10-3/64" (W) x 7-43/64" (D).

**OPERATION:**

The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.

**NOTE:**

On the satin finish, possible differences in the brushing are the result of the manufacturing process and must be considered acceptable. Minimal welding discontinuities must be considered acceptable.