





This product contributes to LEED® credit



ITEM **COMBINATION PAPER TOWEL DISPENSER / WASTE UNIT:**
GBA.105.0001.xx RECESSED UNIT WITH WASTE UNIT FOR CONVERTIBLE COMBINATION
GBA.105.0002.xx PAPER TOWEL DISPENSER
GBA.105.00WR.00 REMOVABLE WASTE RECEPTACLE - NOT INCLUDED



□ Outer surface
 ■ Inner surface

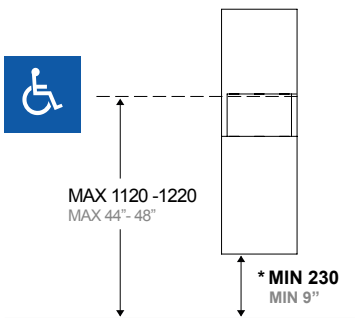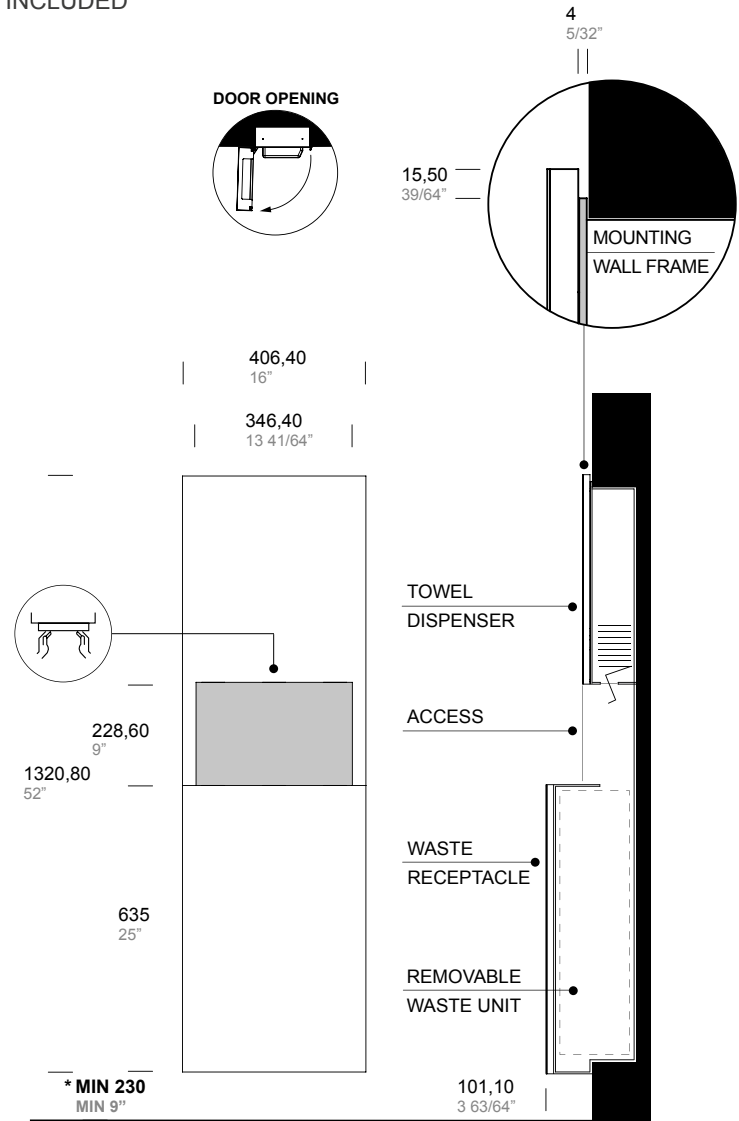

WALL OPENING
 Height: 50 1/8" (1273 mm)
 Width: 14 1/8" (358 mm)
 Depth: 5 1/4" (133 mm)

.XX STANDARD COMBINATION FINISHES OUTER AND INNER SURFACE

	SATIN		POWDER COATED			
	.44	.31	.38	.39	.32	.40
□ OUTER	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]
■ INNER AND MOUNTING WALL FRAME	POWDER COATED					
	.XX	.31	.38	.39	.32	.40
	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]	[Color swatch]

INNER SURFACE FINISH OPTIONS ON REQUEST *
 * minimum order quantity

ANTI-MICROBIAL COATING ONLY FOR OUTER SURFACE

	.99	.99
AMC	[Color swatch]	[Color swatch]

For more information on compliant location see project guide page 149.

The manufacturer reserves the right to alter, improve and discontinue any features of the product [make changes and improvements in designs and dimensions] without notice.



GBA.105.0001

SPECIFICATION:

Convertible combined unit for dispensing paper towel / paper roll and waste unit for recessed installation with final overall dimensions 52" (H) x 16" (W) and 3-63/64" total projection from wall.

GBA.105.0001 includes:

Mounting wall frame in 5/32" (4 mm) thick welded on a all-welded construction in 3/64" (1 mm) thick type 316L stainless steel with powder coated finish for recessed installation.

Bottom front door (waste receptacle) with beautiful non-rounded design made with 1/16" (1,5 mm) and 5/64" (2 mm) thick type 316L stainless steel welded-per-point. Reinforced structure with full height square 19/32" (15 mm) type 316L stainless steel tube. Exposed surfaces of front door have satin finish.

Integrated hinge system to allow the door opening with a minimum gap from the wall (thickness of mounting wall frame).

Unit equipped with a slider door-opening limiter and a concealed closure system which keeps the door closed (not locked). Rectangular hole on side allows access to open the unit with provided key.

Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) to be order separately with a capacity of 8,02 US gal (30,3 L). Waste receptacle shall be model GBA.105.00WR.00. One key included.

CONVERTIBLE OPTION (to be ordered separately)

- Upper front door and paper towel dispenser shall be item GBA.105.0002

OPERATION:

GBA.105.0001 + GBA.105.0002 - Use provided key from side hole to open the front door to have access to recessed unit. The sliding door-opening limiter prevents the door for extra-overture which may cause damages to the wall / tiles. Place recharge of paper towel packs through the front opening of the dispenser.

Paper towel dispenser will dispense up to 600 C-fold or multifold (Z-fold) paper towels from the front opening window.

Fits standard size paper towels up to a maximum of 10-15/64" (260 mm) x 3-55/64" (98 mm).

The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.

INSTALLATION:

Provide framed rough wall opening 50-1/8" height x 14-1/8" width (1273 x 358 mm). Suggested depth to finish face of wall is 5-1/4" (133 mm); minimum recessed depth required is 5-1/8" (130 mm).

Allow clearance for construction features that may protrude into rough wall opening from opposite wall and avoid pipes, vents and conduits.

Mount unit into wall opening and secure with provided fixing screws in 4 mounting holes on the recessed cabinet.

GBA.105.0002

SPECIFICATION:

Upper front door and paper towel dispenser for convertible combined unit with waste receptacle for recessed installation.

GBA.105.0002 includes:

Paper towel dispenser made in 3/64" (1 mm) thick type 316L stainless steel with powder coated finish. Front door with beautiful non-rounded design made with 1/16" (1,5 mm) and 5/64" (2 mm) thick type 316L stainless steel welded-per-point. Reinforced structure with full height square 19/32" (15 mm) type 316L stainless steel tube. Exposed surfaces of front door have satin finish.

Integrated hinge system to allow the door opening with a minimum gap from the wall (thickness of mounting wall frame).

GBA.105.00WR

SPECIFICATION:

Removable leakproof molded waste receptacle in 5/64" (2 mm) black PST (polystyrene) with a capacity of 8,02 US gal (30,3 L) suitable for item GBA.105.0001.

Dimensions 23-1/8" (H) x 10-3/64" (W) x 8-37/64"(D).

OPERATION:


The leakproof waste receptacle is removable for servicing: lift slightly and pull forward to remove it from the unit.

NOTE:

On the satin finish, possible differences in the brushing are the result of the manufacturing process and must be considered acceptable.

Minimal welding discontinuities must be considered acceptable.


This product contributes to LEED® credit

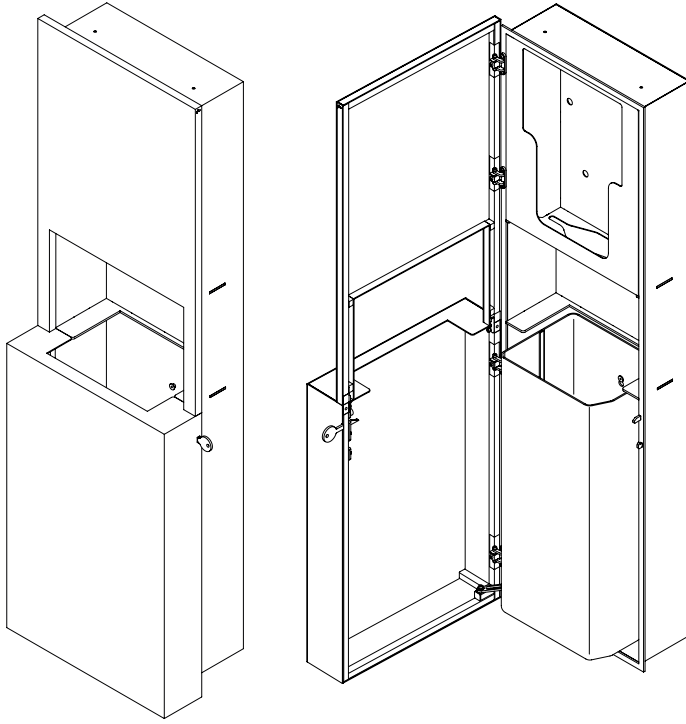

OPENING KEY DETAIL



REMOVABLE WASTE RECEPTACLE



KEY INCLUDED

ITEM

GBA.100.0KEY.00

**REMOVABLE WASTE
RECEPTACLE NOT INCLUDED**

ITEM

GBA.105.00WR.00